

Door Quote/Order Form

Customer Support: (888) 234-9455

ATTENTION: Form must be downloaded and saved to your files before you fill out and submit.

Customer: _____

Contact Person: _____

PO#: _____

Job Name: _____

Today's Date: _____

Due Date: _____

Sales: _____

Page: _____ of _____

 Quote

 Order

Quoted: _____

Ship to:

 Customer

 Jobsite

 CPU

Line	Quantity	Handing	Gauge	Material	Opening Width (in)	Opening Height (in)	Jamb Depth (in)	Net Width (in)	Net Height (in)	Undercut	Thickness	Fire Label (Min.)	Door Style	Core	Seam @ Edge	Bevel Edge	Locations	Hinges (std BS 1/4")	Lock/Strike/Backset	Astragal Flat or Z	Closer	Mark #	Notes
1																							
2																							
3																							
4																							
5																							
6																							
7																							
8																							

Legend

Gauge	Material
8 - 18 ga.	A = A60
6 - 16 ga.	S = SS
4 - 14 ga.	
2 - 12 ga.	

Door Style

Core
P - Polystyrene S - Steel Stiffened T - Temp Rise* *List Degree

Locations
AM - Amweld CE - Ceco CU - Curries ME - Mesker NR - New Republic OR - Old Republic PI - Pioneer PR - Premier ST - Steelcraft *Provide Seperate Drawing

Thickness
4 - 1-3/4" 8 - 1-3/8" 0 - Other (list)


Lock/Strike		
1 - 161 2 - 161x2 1/8" DL 3 - 160 4 - 86 Edge 5 - Mortise* 6 - 1-1/2" DL	A - ASA D - DL Strike F - Flushbolt N - None T - T Strike AD - ASA x DL AF - ASA x FB	B - Surf. Bolts C - Conc. Vert. Rod M - Mort. Panic P - Push/Pull R - Rim Panic S - Surf. Vert. Rod

Seam and Edge
N - Not Seamless B - Bondo Seamless W - Welded Seamless* *N/A on Hemmed Edge

Hinge
A - 4.5 S.W. B - 4.5 H.W. C - 5 S.W. D - 5 H.W. C/H - Continuous Hlnge N - None E - Enter Note

Astragals
FL - Flat Loose FI - Flat Inst. ZL - Z Loose ZI - Z Inst. N - None

Notes:

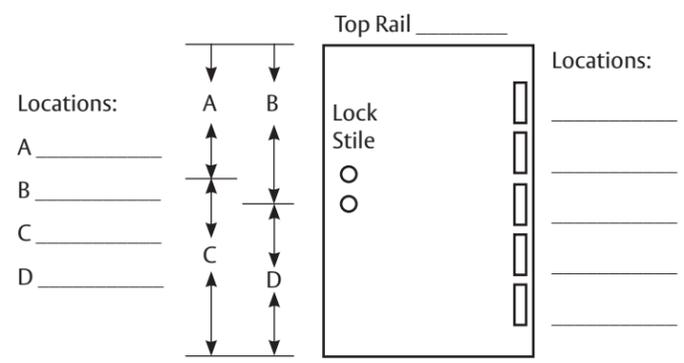

Must save form, then
Email completed form to:

Forms must be filled in completely for expedited proposal. Missing information will cause delays.

Quotes: quotes.concept@assaabloy.com

Orders: orders.concept@assaabloy.com